


DETAIL-3

AN122721 PIN 2 REQD
INSTALL FLUSH TO
1060 BELOW SURF.
POINT STAKE 3 PLACES
TYP

MS2131B-15 DRIVE SCREW-

NAS1455 B00-5 CHAIN

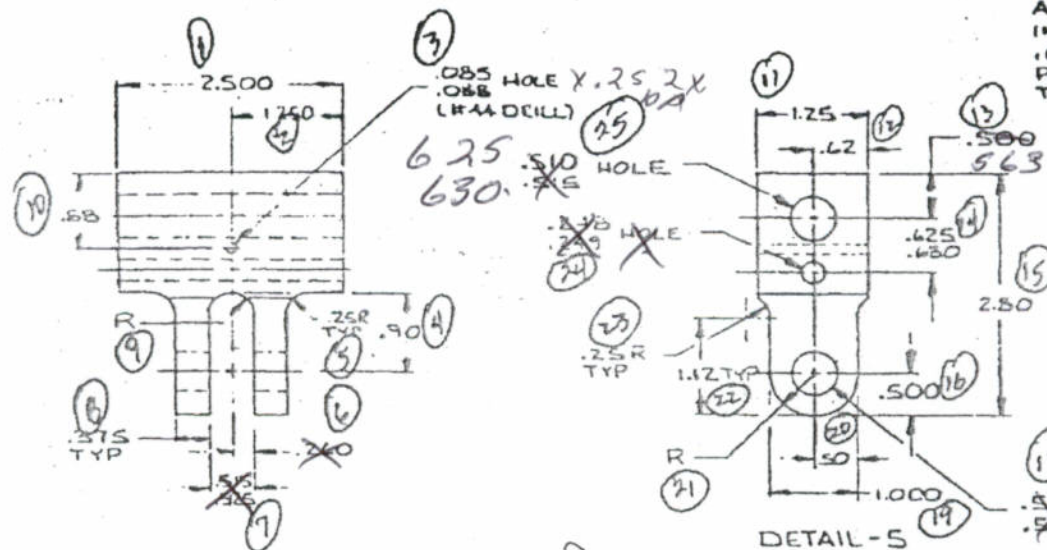


DETAIL - 5

~~505~~ DIA 2 HOLES
~~515~~ IN LINE

1375

380

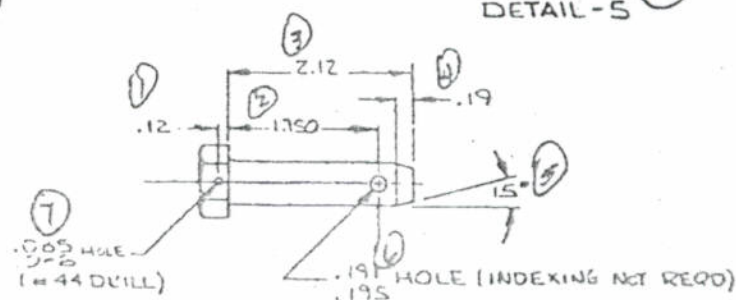

DETAIL-7

SHOP COPY

UNDER REVIEW

URF 19-1278 19.11.08 (VM)